

# DB-HP Top No-Go Landing Nipple

DB-HP landing nipples are high-pressure, large-bore, top no-go nipples that allow landing, locking, and sealing of locks with attached flow-control devices in the production tubing.

## APPLICATION

- Single and dual completions

## BENEFITS

- High-pressure rating without increasing nipple OD
- Field-proven design

## FEATURES

- Large bore
- Dependable no-go locator
- Metallurgy compatible with service environment
- Thread connection choices to match tubing


The internal profile of these nipples includes a shoulder that engages the no-go of the appropriate lock and a locking recess.

These nipples accept DB-6-HP locks, and the DB-6N-HP bottom no-go nipples accept the DB-6N-HP locks. The DB-HP-series nipples are available in many bore sizes for stacked, multiple-nipple applications. When installed, the locking dogs move into the locking recess of the nipple, and the lock packing seals in the nipple's polished bore.

DB-HP landing nipples are available in a wide range of metallurgies for a variety of applications, working pressures, and environments.

## DESCRIPTION AND OPERATION

To install a no-go lock in DB-HP-series nipples, the lock and attached flow-control device are run into the tubing using standard slickline methods. The assembly is lowered until the no-go of the lock contacts the nipple no-go shoulder. Downward jarring moves the locking dogs of the lock into the nipple locking recess to anchor the assembly, and the lock packing seals in the nipple sealbore.

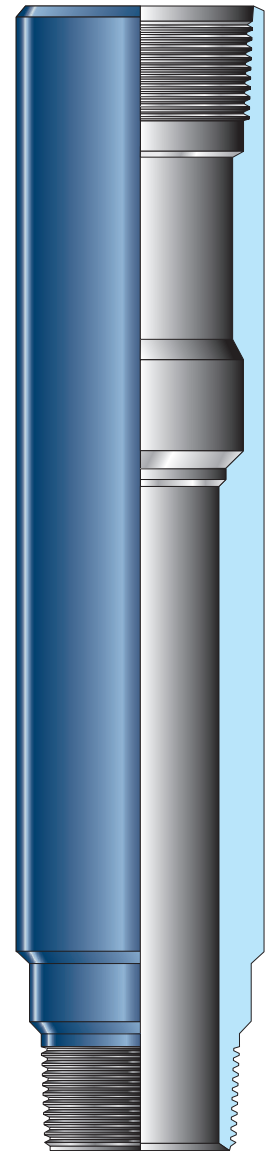

# DB-HP Top No-Go Landing Nipple

DB-HP Top No-Go Landing Nipple Specifications			
Tubing		Nipples <sup>†</sup>	
OD (in. [mm])	Weight (lbm/ft)	Max. OD <sup>‡</sup> (in. [mm])	Sealbore <sup>§</sup> (in. [mm])
4.000 [101.6]	11.0	5.000 [27.0]	3.125 [79.4]
			3.250 [82.6]
4.500 [114.3]	12.8	5.562 [141.3]	3.187 [80.9]
			3.312 [84.1]
			3.437 [87.3]
			3.562 [90.5]
5.000 [127.0]	15.0	5.562 [141.3]	3.687 [93.6]
			3.813 [96.9]
			3.937 [100.0]
			3.312 [84.1]
			3.437 [87.3]
5.500 [139.7]	17.0	6.050 [153.7]	3.562 [90.5]
			3.687 [93.6]
			3.813 [96.9]
			3.937 [100.0]
			3.937 [100.0] <sup>††</sup>
5.500 [139.7]	17.0	6.050 [153.7]	4.125 [104.8]
			4.312 [109.5]
			4.500 [114.3]

<sup>†</sup> Model DB-HP landing nipples are available with all API and most premium tubing thread connections.

<sup>‡</sup> OD will vary with tubing weight and thread type.

<sup>§</sup> Other sizes are available on request. Contact your local Schlumberger representative.

<sup>††</sup> Bottom no-go nipple with reduced ID.

[www.slb.com/completions](http://www.slb.com/completions)

**Schlumberger**