

QUANTUM No-Go Locator

Provides a surface indication that the seal assembly is correctly positioned in the polished bore

APPLICATIONS

- Single- or multiple-zone completions
- Preferred locator for long, multiple-string seal assemblies

BENEFITS


- Simplifies operations to save rig time
- Design provides indication of proper seal location in the sealbore
- Enhances reliability

FEATURES

- Easy sting-in and release procedures
- Limited seal movement
- Suitable for applications where the seals are allowed to float
- Compatible with most sealbore packers and polished bore receptacles
- Manufactured from materials that comply with NACE MR0175 standards
- High-performance seals available for more hostile environments

QUANTUM* gravel-pack packer no-go locators are typically used for applications in which it is necessary to prevent downward movement only. They are used in applications that allow tubing seals to float. The no-go locator allows retrieval by simple straight pull.

Standard no-go locators are manufactured from materials that comply with NACE MR0175 standards for sulfide stress cracking-resistant metallic materials and are fitted with nitrile bonded seals that are tolerant to debris, tubing reciprocation, and pressure unloading. Viton®, Aflas®, and chevron-type seals are available on special request for H₂S and high-pressure, high-temperature applications.

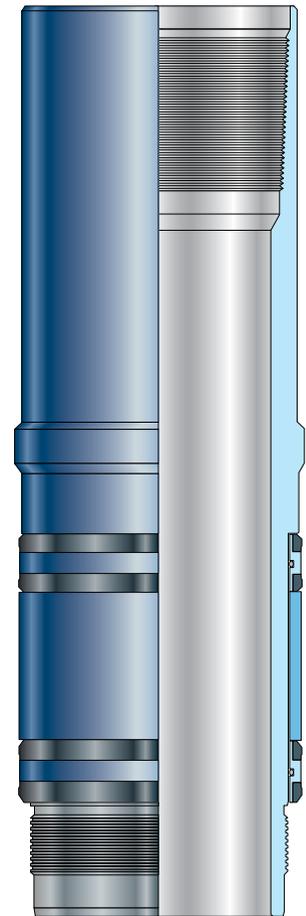

QUANTUM no-go locator.

QUANTUM No-Go Locator Specifications

Size, [†] in [mm]	Max. OD, in [mm]	Min. ID, in [mm]	Pressure Rating, psi [kPa]	Standard Top Connection
5.000 × 2.688 [127.0 × 68.3]	2.937 [75.6]	1.950 [49.5]	9,000 [62,055]	2.375
5.500 × 3.000 [139.7 × 76.2]	3.250 [82.6]	2.350 [59.7]	7,300 [50,334]	2.875
7.000, 7.625 × 3.250 [177.8, 193.7 × 82.6]	3.460 [87.9]	2.375 [60.3]	9,300 [64,124]	2.875
7.000, 7.625 × 4.000 [177.8, 193.7 × 101.6]	4.150 [105.4]	3.030 [77.0]	9,100 [62,745]	4.000
9.625 × 4.750 [244.5 × 120.7]	4.940 [125.5]	3.280 [83.3]	8,600 [59,297]	3.500
9.625 × 6.000 [244.5 × 152.4]	6.200 [157.5]	4.740 [120.4]	7,800 [53,781]	5.500

[†] Other sizes are available on request. Contact your local Schlumberger representative.